


IDEAL THERMSTORE PRE-PLUMBED S



B rated up to 210L



Corrugated coil provides increased heat transfer and prevention of scale build up

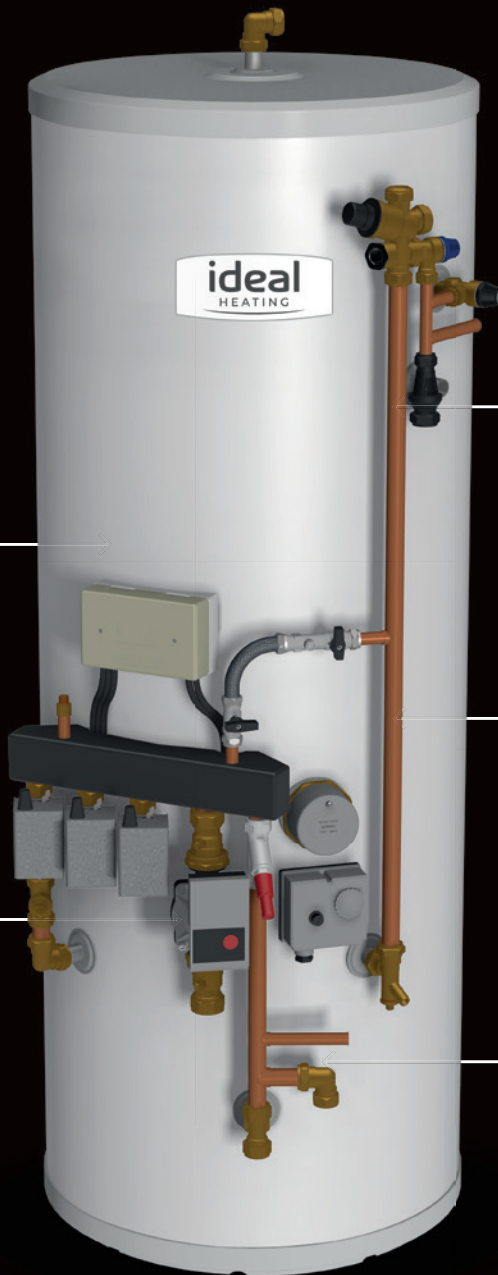

Designed with flat top to increase insulation



Manifold configuration comes complete with two heating zones



Pre-plumbed kit guarantees standardised pipe configuration for efficient new-build installations

TECHNICAL SPECIFICATION

Ideal Thermstore Pre-plumbed S

Description		IND120	IND150	IND180	IND210	IND250	IND300
Product stock code		IDEPROIN120PPSP	IDEPROIN150PPSP	IDEPROIN180PPSP	IDEPROIN210PPSP	IDEPROIN250PPSP	IDEPROIN300PPSP
ErP rating		B	B	B	B	C	C
Heat loss	watts	39	47	55	62	74	86
Heat loss (kW/24hr)	watts	0.94	1.13	1.32	1.49	1.78	2.06
Capacity	litres	119	148	178	208	248	287
Height	mm	931	1118	1306	1494	1744	1990
Diameter	mm	550	550	550	550	550	550
Weight (empty)	kg	33	36	41	44	49	54
Weight (full)	kg	152	184	219	252	297	341
Heat up time	min	21	25	30	32	36	38
Number of immersions		1	1	1	1	2	2
Secondary return		No	No	No	Yes	Yes	Yes

T: 01482 492251 E: ideal@idealheating.com

Ideal Heating, PO Box 103, National Avenue, Kingston upon Hull, East Yorkshire, HU5 4JN.